



Specification Sheet

MIT3-AS Underfloor Air Diffuser Terminal (Constant Volume)

Description



MIT3-AS (Modular Integrated Terminal) is a constant volume diffuser for use in raised floor air systems. The underfloor terminal features 20 gauge (1mm) galvanized steel construction, pre-painted flat black. A 13.3" x 4.8" (337mm x 122mm) opening permits air flow from the underfloor plenum.

The nominal 10" x 10" (254mm x 254mm) cast aluminum diffuser grille includes two separate inserts, which can be configured to create alternate air throw patterns. Ten (10) standard colors are available; custom colors and finishes can be provided to match architectural design (specify on order).



Features

- Robust cast aluminum grille frame
- Riveted pre-painted galvanized steel
- Multiple grille configurations for variable air throw patterns

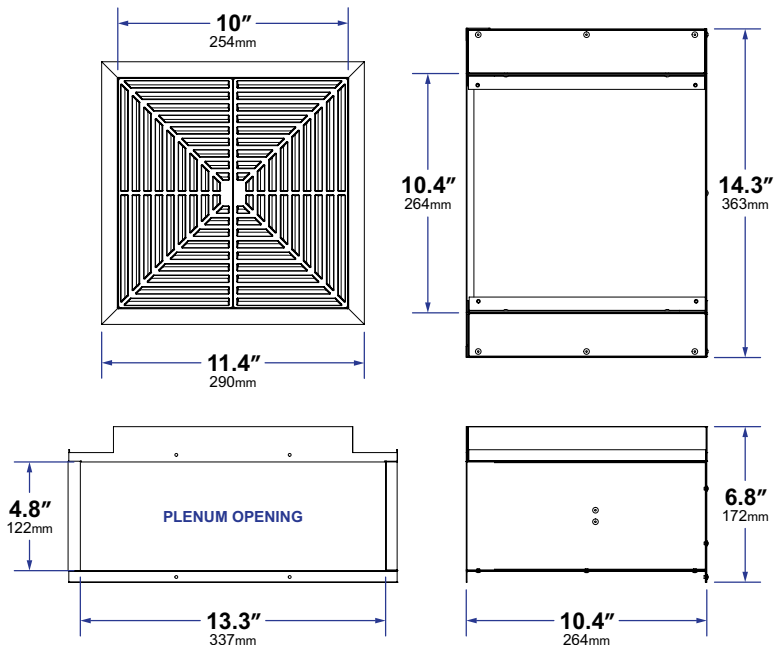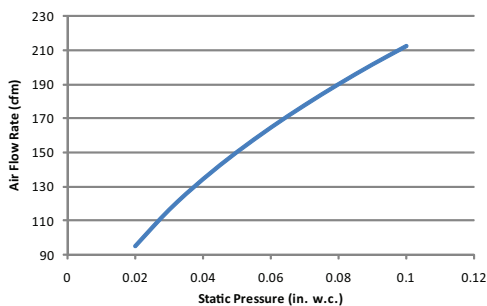

ALL DIMENSIONS NOMINAL +/- 0.1" (2.5mm)

Specifications

Application:	Underfloor Cooling Raised Access Floors 8" (203mm) +
Grille Dimensions: LxW (Nominal)	Diffuser Opening: 10" x 10" (254mm x 254mm) Full Face: 11.4" x 11.4" (290mm x 290mm) Installation Cut-Out: 10.5" x 10.5" [+1.125/-0.00] (267mm x 267mm [+3.175/-0.00])
Grille Rating:	Cast Aluminum Conforms to NFPA 90a 1250 lbs. (567 Kg) Load Strength
Supply Press. / Temp.:	0.02–0.1 in. w.c. (5–25 Pa) 40–120°F (4–49°C)
Capacity (Nominal):	150 cfm @ 0.05 in. w.c. (255 m³/hr @ 12.5 Pa)
Noise Criterion:	≤ NC-17 (All Flow Conditions)